

Stick Logger

GPRS/WIFI/4G



High reliability
IP65 design, resistant to harsh environment




Remote upgrade
Devices could be upgraded and debugged remotely for easy maintenance



Data resuming
Ensure completeness of collected data
String monitoring, easy for checking abnormal strings



System Application

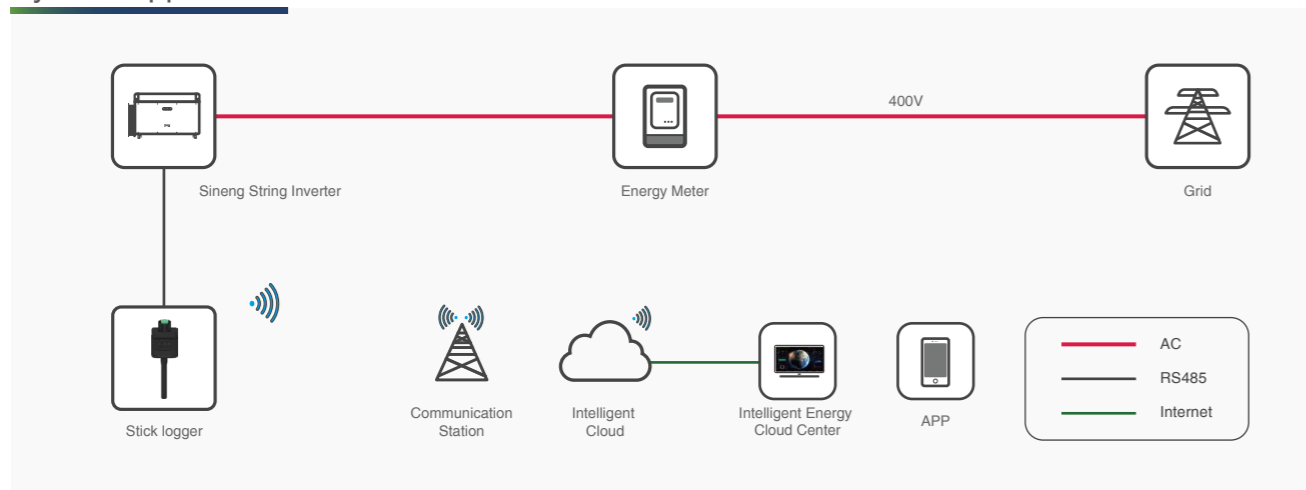

Product Model	LSG-3	LSW-3	LS4G-4
Remote Communication Interface	GPRS	2.4G WiFi	4G
Antenna	External Antenna	External Antenna	External Antenna
Data Interface	RS485/RS232/TTL	RS485/RS232/TTL	RS485/RS232/TTL
Working Voltage	DC 5-12V	DC 5-12V	DC 5-12V
Working Power	3W	1.5W	3.5W
SIM Card	Chip Card/MicroSIM	/	Chip Card/MicroSIM
Memory	2M Flash	2M Flash	8M Flash
Working Temperature	-40 C ~ +85 C	-40 C ~ +85 C	-40 C ~ +85 C
Working Humidity	< 90% (No Condensation)	< 90% (No Condensation)	< 90% (No Condensation)
No. of Connections	One	One	One
Serial Communication Rate	9600bps(1200-115200bps Configurable)		
Date Acquisition Interval	Default:5mins (1-15 mins Configurable)		
User Configuration	APP/BT	APP/Web	APP
Firmware Upgrade	Remote	Remote/Web	Remote
Power-off Reminder	/	/	√