

SN3.0/4.0/5.0/6.0/8.0/10/12PT

Three Phase PV Inverter/2 MPPTs

Safe & Reliable

IP66 protection & C5 anti-corrosion rating
Type II SPD, both DC & AC sides
Built-in arc-fault circuit-interrupter

High-Performance Management

Accurate string current detection
Support export power limit
Local & remote maintenance

High Yield


Max. efficiency up to 98.5%
Up to 16A, max MPPT input current
1.1 times continuous output overload

User-Friendly Design

Fanless design for quiet operation
Optional OLED screen
Quickly set up smart monitoring via APP



Circuit Diagram

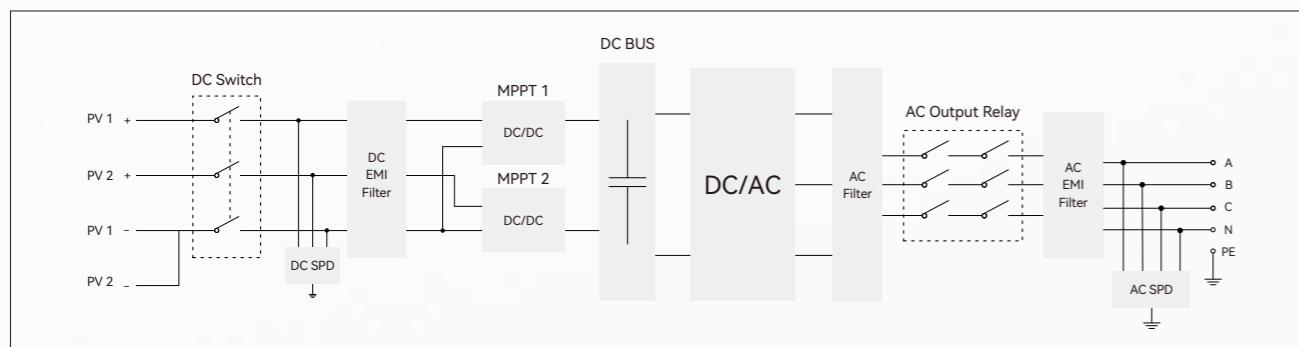

Model	SN3.0PT	SN4.0PT	SN5.0PT	SN6.0PT	SN8.0PT	SN10PT	SN12PT
Input (PV)							
Max. PV input voltage					1100V		
Recommended max. PV power (STC)	4.5kWp	6kWp	7.5kWp	9kWp	12kWp	15kWp	18kWp
Nominal PV input voltage					620V		
MPPT operating voltage range					140V~1000V		
Full power MPPT voltage range	190V~850V	190V~850V	190V~850V	225V~850V	310V~850V	375V~850V	450V~850V
Startup PV voltage					180V		
Number of PV inputs					2 (2 MPPTs, 1/1)		
Max. current per MPPT					16A		
Max. short circuit current per MPPT					25A		
Output (grid)							
Nominal output power	3kW	4kW	5kW	6kW	8kW	10kW	12kW
Max. output apparent power	3.3kVA	4.4kVA	5.5kVA	6.6kVA	8.8kVA	11kVA	13.2kVA
Max. output current	4.8A	6.4A	8A	9.6A	12.8A	15.9A	19.1A
Nominal grid voltage					3L/N/PE, 230V/400V		
Grid voltage range					320V~480V (According to local standards)		
Nominal grid frequency					50/60Hz		
Power factor range					0.8leading~0.8lagging		
Harmonic (THD)					<3%		
Efficiency							
Max. efficiency	98.00%	98.00%	98.10%	98.20%	98.30%	98.40%	98.50%
EU efficiency	97.60%	97.70%	97.70%	97.80%	98.00%	98.10%	98.20%
General data							
Display mode					LED, OLED(optional)		
Communication port					RS485,WIFI/4G/Ethernet		
Weight	14.5kg	14.5kg	14.5kg	14.5kg	14.5kg	15kg	15kg
Dimensions (W*H*D)					530*465*174mm		
Max. operating altitude					4000m(>3000m derating)		
Cooling method					Natural		
Humidity					0~100%		
Operating temperature					-25~60°C		
Protection level					IP66		
Topology					Transformerless		
Self-consumption at night					< 1W		
Protection							
Leakage current protection					Yes		
Anti-island protection					Yes		
DC reverse protection					Yes		
AC short circuit protection					Yes		
PV string current detection					Yes		
PID recovery					Optional		
DC switch					Yes		
Arc-fault circuit-interrupter					Yes		
Surge protection					DC II/AC II		
Insulation monitoring					Yes		
Over-voltage protection					AC III/DC II		

IEC 62109-1/2, IEC61000-6, IEC62116, IEC61727, IEC61683, IEC60068, IEC61000-3, EN50549-1, VDE4105, C10/11, CEI-0-21, PTPREE, ORDINANCE No.140

© 2024 SINENG ELECTRIC CO., LTD. ALL RIGHTS RESERVED. SUBJECT TO CHANGE WITHOUT NOTICE.