

SP-350K-INHB

SP Series String Inverter



More power generation

- Max. efficiency 99%, Euro efficiency 98.8%
- 6 MPPTs for tracking maximum power
- Support bifacial PV modules, DC/AC ratio up to 1.8



Low system cost

- Support aluminum cable access, saving cable costs
- Support PLC communication, save communication cable



High reliability

- IP66 protection and C5 anti-corrosion rating
- Cooling fan with IP68 protection level
- Integrated string monitoring function




Grid friendly

- Support LVRT and HVRT functions
- Support Active & Reactive power control
- Compatible with different grid codes



Circuit Diagram

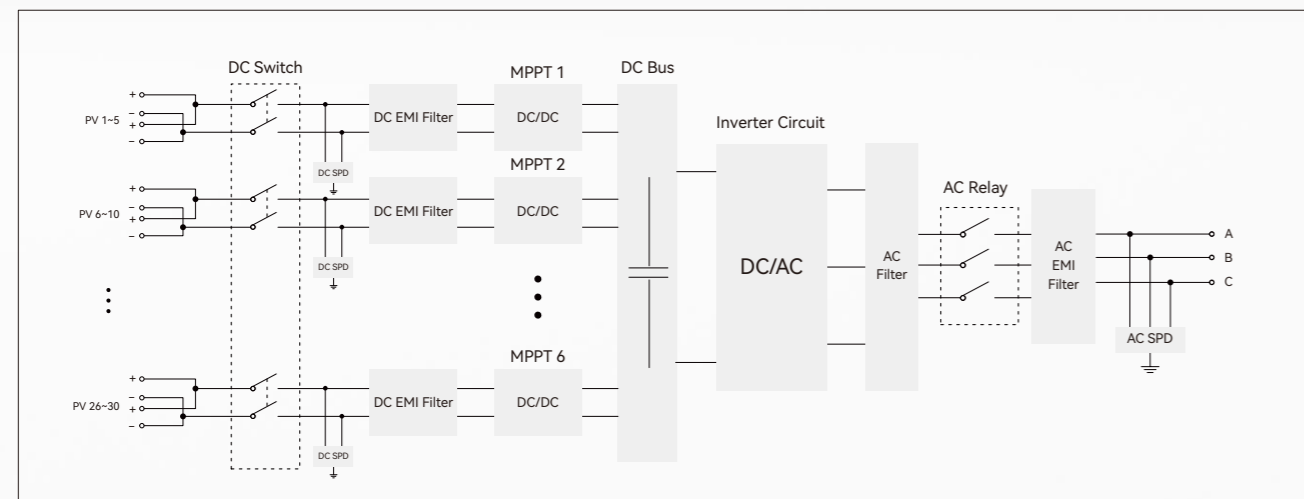

Model		SP-350K-INHB
Input (DC)		
Max. PV input voltage		1500V
MPPT Max. input current		75A*6
Rated input voltage		1080V
MPP voltage range		500~1500V
MPP voltage range for nominal power		880~1300V
Number of MPPT		6
Number of PV strings		30
Output (AC)		
AC output power		300kW@51°C/305kW@50°C/352kW@30°C
Max. output power		352kW
Rated grid voltage		800V
Grid voltage range		640~920V
Max. output current		254A
Rated grid frequency/range		50Hz±5Hz/60Hz±5Hz
Output current harmonic (at nominal power)		<3%
Power factor at nominal power/range		>0.99/0.8leading to 0.8lagging
Protection		
DC reverse connection protection		Yes
Oversoltage protection		DC Type II/AC Type II
Leakage current protection		Yes
Grid monitoring		Yes
Insulation monitoring		Yes
Anti-island protection		Yes
Efficiency		
Max. efficiency		99%
EU efficiency		98.8%
General data		
Isolation method		Transformerless
Self-consuming in night		<3.5W
Protection level		IP66
Operating temperature		-30°C ~ +60°C
Allowed humidity (non condensing)		0~100%
Cooling mode		Temperature controlled forced air cooling
Max.operating altitude		4000m
Communication port		Standard: PLC, Optional: RS485
Certificates and approvals (more available on request)		CE,IEC 62109, IEC 61727, IEC 61683, IEC 62116, IEC 60068, IEC61000
Dimensions (W×H×D)		1317×735×403mm
Weight		135kg